


<b>Technical data</b>	<b>Class A filter 6SL3000-0BE32-5AA0</b>
Rated voltage VR	530/ 310 V <sub>~</sub> , 50/60 Hz
Rated current IR	Referred to a 50 °C ambient temperature
Test voltage VP	2280 V <sub>~</sub> , 2 s (cable/cable) 2750 V <sub>~</sub> , 2 s (cable/housing);
Leakage current IAbI	At 530 V <sub>~</sub> , 50 Hz
Climate category	According to EN 60068-1

**Characteristic data and Order Nos.**

IR A	IabI mA	Typical Rtype mΩ	Weight, approx. kg	Order No.
250	< 7	0.053	12.3	<b>6SL3000-0BE32-5AA0</b>

**Dimension drawings**

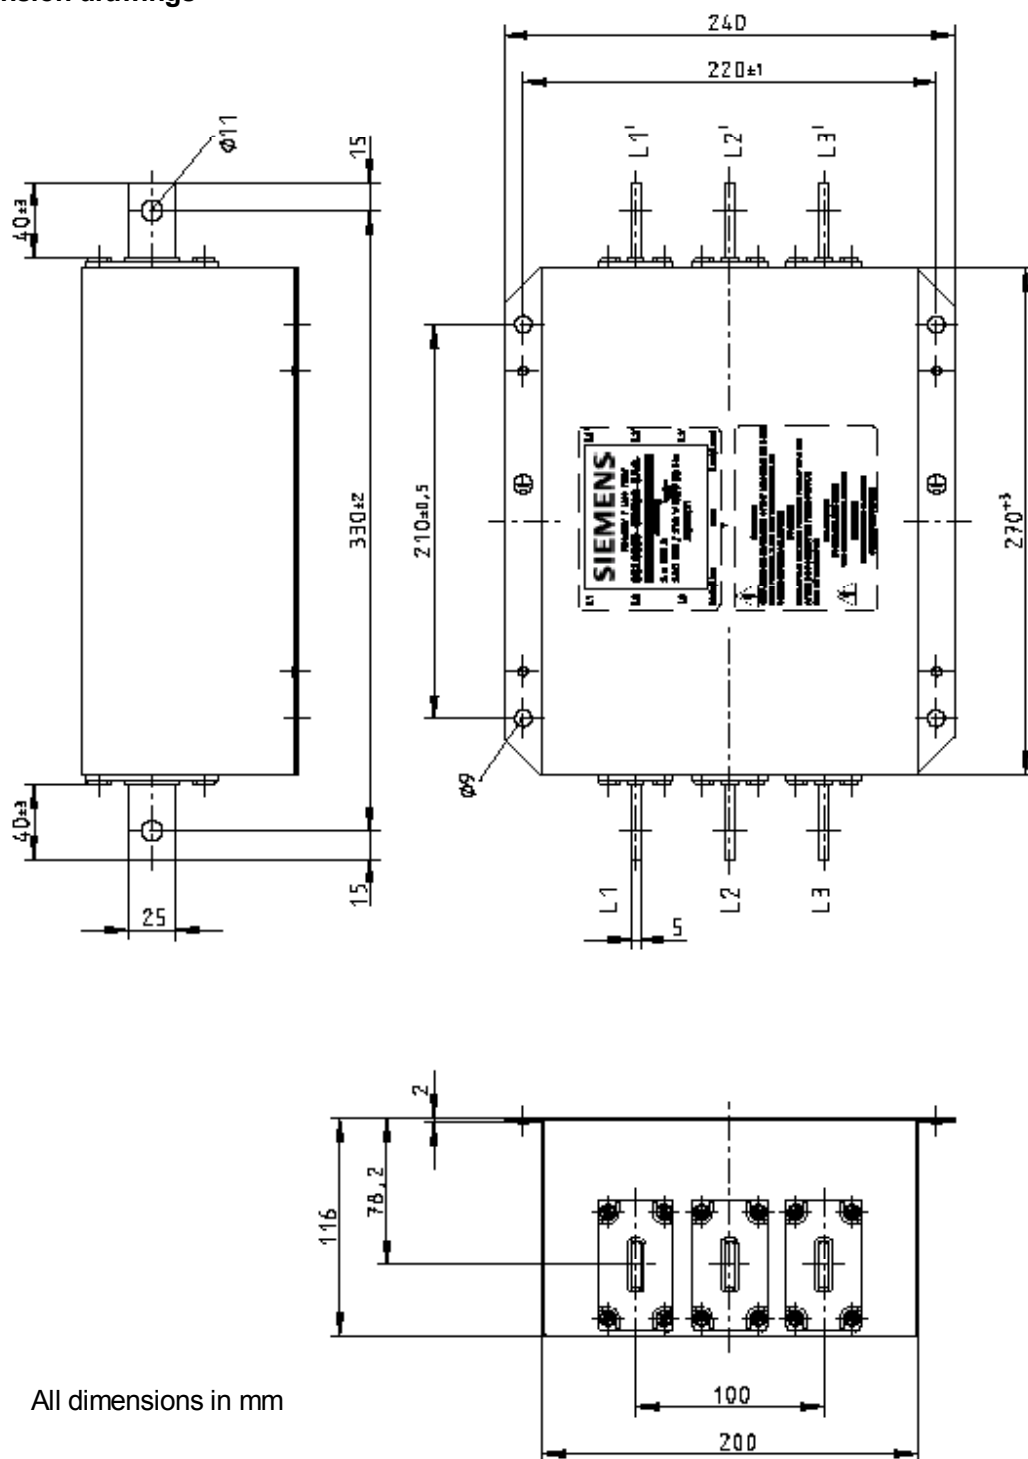


All dimensions in mm

<b>Technical data</b>	<b>Class A filter 6SL3000-0BE34-4AA0</b>
Rated voltage VR	530/ 310 V <sub>~</sub> , 50/60 Hz
Rated current IR	Referred to a 50 °C ambient temperature
Test voltage VP	2280 V <sub>~</sub> , 2 s (cable/cable) 2750 V <sub>~</sub> , 2 s (cable/housing);
Leakage current IAbI	At 530 V <sub>~</sub> , 50 Hz
Climate category	According to EN 60068-1

**Characteristic data and Order Nos.**

IR A	IabI mA	Typical Rtype mΩ	Weight, approx. kg	Order No.
440	< 7	0.053	12.3	<b>6SL3000-0BE34-4AA0</b>

**Dimension drawings**

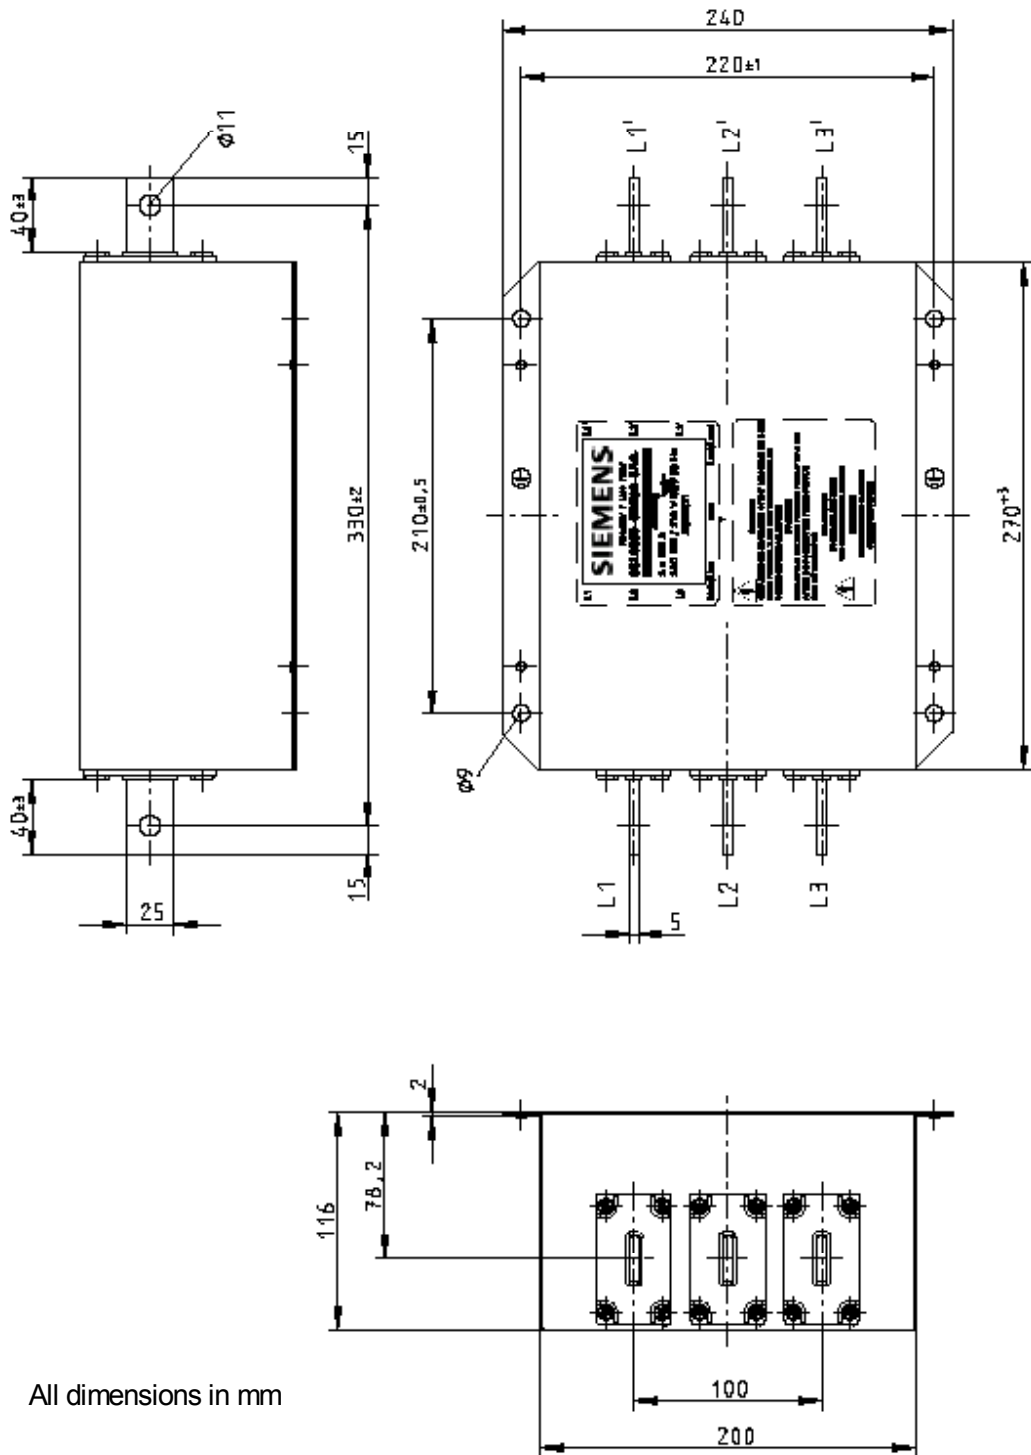


All dimensions in mm

<b>Technical data</b>	<b>Class A filter 6SL3000-0BE36-0AA0</b>
Rated voltage VR	530/ 310 V <sub>~</sub> , 50/60 Hz
Rated current IR	Referred to a 50 °C ambient temperature
Test voltage VP	2280 V <sub>~</sub> , 2 s (cable/cable) 2750 V <sub>~</sub> , 2 s (cable/housing);
Leakage current I <sub>Ab1</sub>	At 530 V <sub>~</sub> , 50 Hz
Climate category	According to EN 60068-1

**Characteristic data and Order Nos.**

IR A	I <sub>abl</sub> mA	Typical R <sub>type</sub> mΩ	Weight, approx. kg	Order No.
600	< 10	0.032	19.0	<b>6SL3000-0BE36-0AA0</b>

**Dimension drawings**

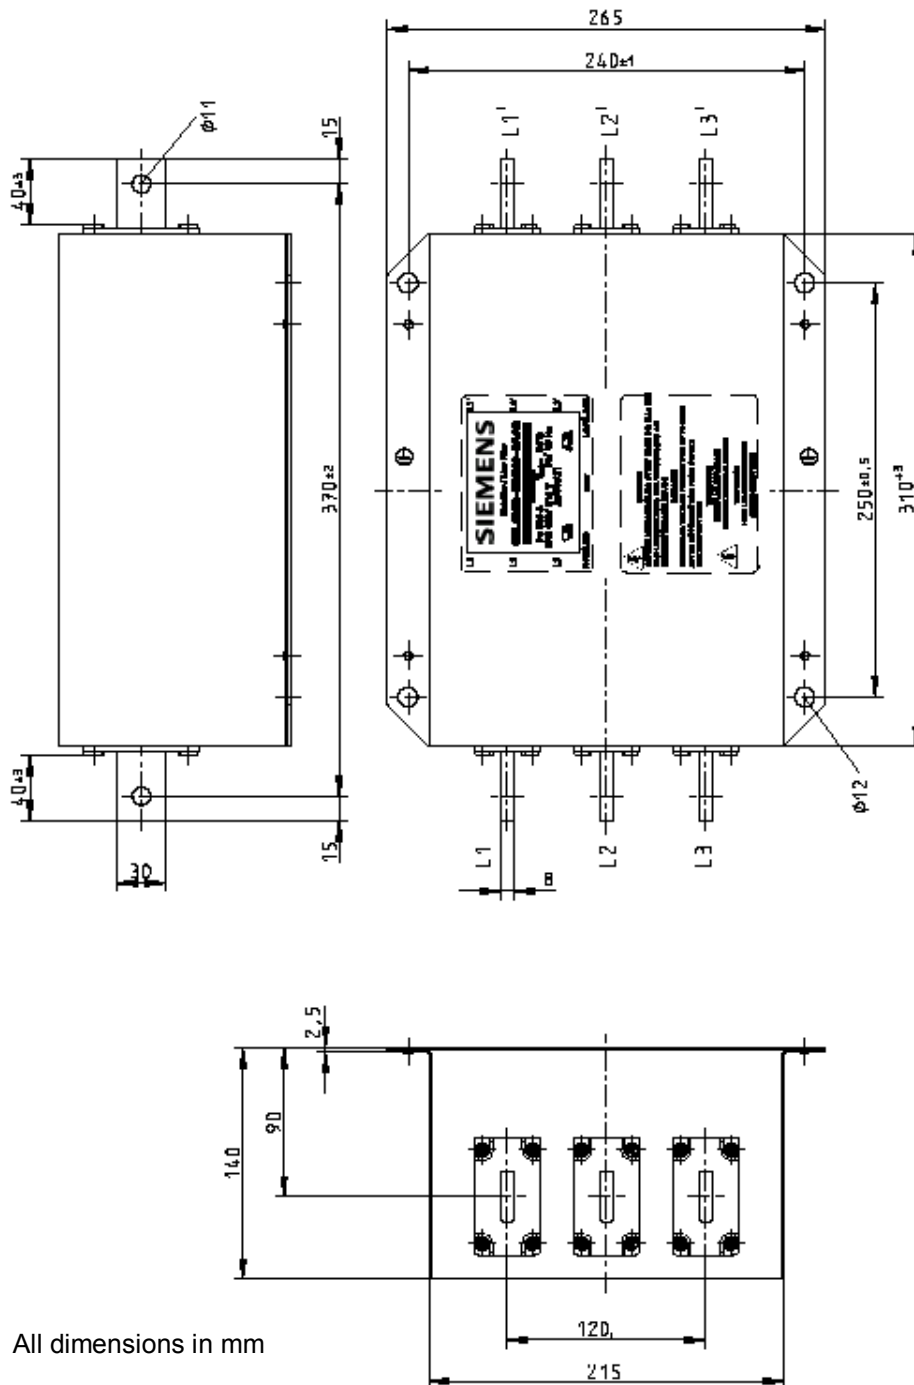

All dimensions in mm